

# SPD3303

## Programmable Linear DC Power Supply



### Application

- R&D lab general purpose testing
- Teaching lab experiment
- Automotive electronic test
- Production testing and quality assessment inspection

### Key Features (SPD3303X/SPD3303X-E)

- 3 independent controlled and isolated output, 32 V/3.2 A×2, 2.5 V/3.3 V/5 V/3.2 A×1, total 220 W
- Max 5 digits Voltage, 4 digits Current Display, Minimum Resolution: 1 mV/1 mA
- Supports panel timing output functions
- 4.3 inch true color TFT- LCD 480x272 display
- 3 types of output modes: independent, series, parallel
- 100 V/120 V/220 V/230 V compatible design to meet the needs of different power grids.
- Intelligent temperature-controlled fan , effectively reducing noise
- Clear graphical interface, with the waveform display function
- Internal 5 groups of system parameter save/recall, supports data storage space expansion
- Provides PC software: Easypower , supports SCPI , LabView driver

### Key Features (SPD3303C)

- 3 independent high precision output: 32 V/3.2 A×2, 2.5 V/3.3 V/5 V/3.2 A×1, total 220 W
- 4 digits voltage and 3 digits current display, min resolution: 10 mV, 10 mA
- Three output modes: independent, series and parallel
- 100 V/120 V/220 V/230 V compatible design, to meet the need of different power grids
- Smart temperature controlled fan, effectively reduce the noise
- Save/Recall 5 group system specifications, support data storage expansion
- Connected to PC via USB Device, support SCPI command, to meet the control and communication needs


# DC Power Supply

## Specifications


Model	SPD3303C	SPD3303X-E	SPD3303X
<b>Channels</b>	CH1: DC voltage range: 0-32 V, DC current range: 0-3.2 A CH2: DC voltage range: 0-32 V, DC current range: 0-3.2 A CH3: DC voltage range: 2.5/3.3/5.0 V, DC current range: 0-3.2 A		
<b>Max output power</b>	220 W		
<b>Resolution</b>	10 mV / 10 mA		1 mV / 1 mA
<b>Display digits</b>	LED display 4 digits voltage 3 digits current	4.3 inch TFT-LCD display 4 digits voltage 3 digits current	4.3 inch TFT-LCD display 5 digits voltage 4 digits current
<b>Ripple noise</b>	CV/CH3: $\leq 1$ mVrms (5 Hz~1 MHz) CC: $\leq 3$ mArms		
<b>Standard interface</b>	USB Device	USB Device, LAN	
<b>Dimension</b>	225 mm (W) $\times$ 136 mm (H) $\times$ 275 mm (D)		
<b>Weight</b>	7.5 kg (SPD3303C) 8 kg (SPD3303X/X-E)		

### • Panel displays the timing output

Through front panel operation, 5 groups of timing settings and output control can be displayed, which provides users a simple power programming function. Also a connection can be made with Siglent's EasyPower PC software providing a full range of communication and control requirements.

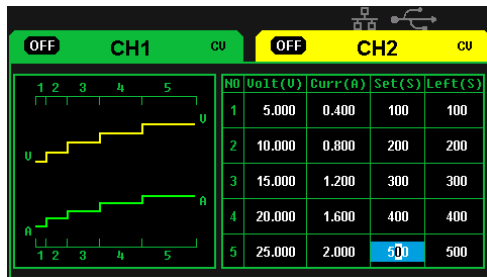


Panel timing output

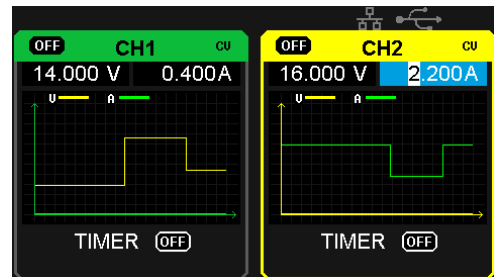

Real time wave display

### • Save/Recall setting parameters

SPD3000X series programmable power supply can save or recall 5 groups of setting parameter in internal storage, also supports external storage expansion. You can easily obtain the settings you needed.

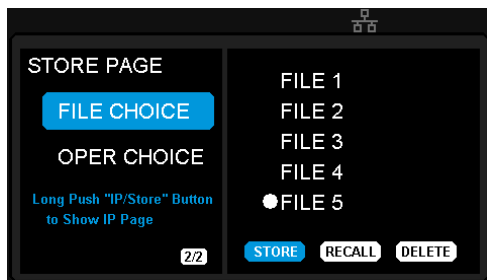

Internal Storage



PC Timer